

Corona SlimLine

High Performance Surface Treatment on a Small Scale

The Corona SlimLine is the ideal surface treatment solution for label printing and narrow web applications, with guaranteed complete ink bonding onto plastics.

Whether for flexo or digital printing, the SlimLine provides a perfect dyne level for the highest print quality on a substrate.


Benefits



Swap cartridge with ease.



Easily & precisely set electrode gap.

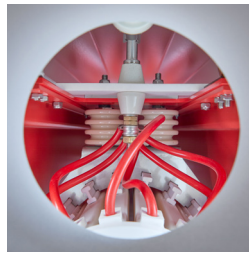


Optimized air flow prevents debris accumulation, making it easier to clean.



Comfortable, top-side positioning of cartridge.




Cartridge equipped with ergonomic handles.

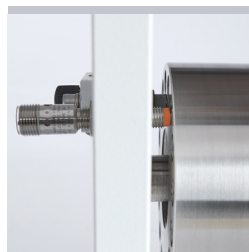

Integrated line speed measurement with automatic power setting & watt density control

Web Path

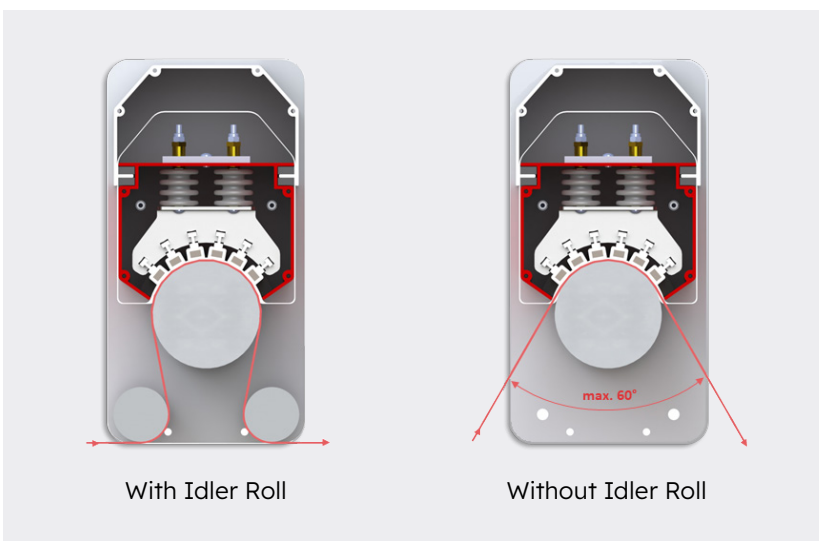

With Idler Roll

Without Idler Roll

Accessories

Ozone Converter CAP 040



- Environmentally friendly and occupationally safe
- Purifies corona exhaust air
- Meets legislation standards
- Designed for narrow web applications

Specifications

Treat widths: 250-900 mm

Web speed: 1-400 m/min

Side for treatment: 1 or 2

Base roll: stainless steel

Mounting: cantilevered or base mounting

Max. generator power: 1 - 4 kW

Options

Ceramic-coated base roll

Generator: max. power > 4 kW

Field bus connection incl. with web server

Remote service module

UL /CSA version

Contact

✉ info@baldwintech.com

For regional contacts please visit baldwintech.com

Follow

